Application of genetic algorithms for optimal positions of source points in method of fundamental solutions

H. Jopek, J.A. Kołodziej
Poznan University of Technology, Institute of Applied Mechanics
Piotrowo 3, 60-965, Poznań, Poland
email: **hubert.jopek@put.poznan.pl**

Abstract

This paper describes the application of the method of fundamental solutions for 2-D harmonic and biharmonic problems. Also, genetic algorithm is presented as a numerical procedure used for the determination of source points positions. Choosing good locations of source points is crucial in the MFS as it has a great impact on the quality of the solution. Genetic algorithm is applied in order to find such an arrangement of source points, which provides the solution of sufficient accuracy.

1   Introduction

In the very new paper [1] the equivalence between Trefftz method and Method of Fundamental Solutions (MFS) has been shown for harmonic and biharmonic problems. In the MFS for a given boundary value problem the solution is represented as a linear combination of fundamental solutions of the governing equation [2]. The unknown coefficients, which occur in the assumed form of solution, are determined by satisfying approximately the appropriate boundary conditions. Those boundary conditions are only satisfied exactly in selected boundary points in which the conditions are collocated.

Apart from points of collocations there are also points located outside the considered domain in which singularities occur – these are called source points. Although the position and the number of source points are important and the final solution depends on it, there is no proven procedure how to arrange the source points.

Generally there are two possible approaches to the problem of source points arrangement. First method is based on the assumption that we know the position of the sources. It means that the coordinates of the points are freely chosen and are given to the numerical procedure as already known parameters. Another possibility is to take the position of source points as unknowns as well, so the final locations are determined during the calculation, but in this case the problem become nonlinear.

In this work Genetic Algorithm [3] is used in order to determine the optimal (or suboptimal) position of source points for boundary value problems with 2-D Laplace equation. In the process of optimization the best solution is chosen according to the evaluation function as a minimum value of squares of errors on the boundaries. For the 2-D problem 2N coordinates represent N number of source points. Each coordinate is related with one dimension in the search space so for the large number of source points the problem gets difficult and time-consuming. Genetic Algorithms, however, have been designed for such multidimensional problems, so in this work GA have been used as an effective method for source points arrangement. Similar approach has been also applied to a problem of potential distribution around electrodes in the charge simulation method [4,5,6].

2   Source points arrangement

The Method of Fundamental Solution is an instance of Trefftz Method, which means that differential equation is satisfied exactly in the considered domain, whereas the boundary conditions are satisfied approximately. In this work, the boundary conditions are collocated in points (collocation points) on the boundary of the domain. The source points are the points in which the singularities of fundamental solution occur and so they should be located outside the considered region. Usually, one of the arrangements presented at Fig 1. Is assumed. The optimization of source points is possible in each case, if it is a geometry-based contour, the distance between geometry and contour is optimized [7, 8], in the circular arrangement: the radius of the circle might be optimized. The last approach, however, requires optimization of the position of each point, which implies high computational costs. In addition to this, in each case the number of source points might be also one of the unknown coefficients, which are optimized.
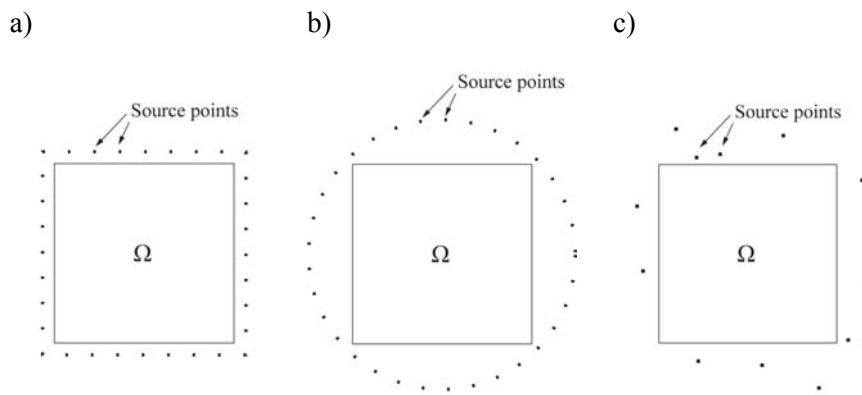

Figure 1: Methods of locating source points:

a) on a contour of scaled geometry, b) on the circle, c) randomly

3   Genetic algorithm

3.1   General concept

Genetic algorithm is a numerical technique used in order to find exact or approximate solution to optimization and search problems. The method is derived from the biological mechanism of evolution; hence some terms and procedures are inspired by biology as well. The optimization process is based on the following scheme presented at Fig. 2:
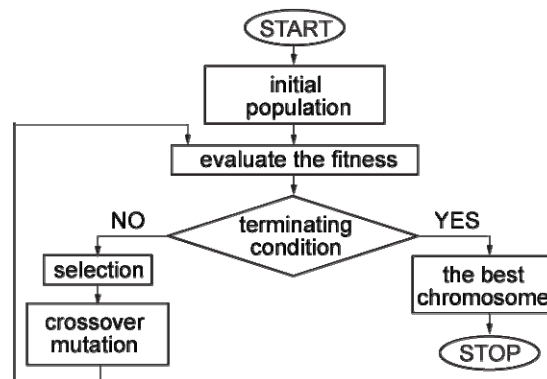
Figure 2: Genetic algorithm scheme

In this paper to objective of optimization process is an optimal or suboptimal source points arrangement. Every such arrangement of source points in which source points are located in assumed region is called a feasible solution and is called a chromosome. In genetic algorithms, in each step several chromosomes are considered and such set is a population. At the beginning the initial population is created in such a way that the chromosomes are chosen randomly and they are represented by binary strings, though real-value encoding is also possible. Next, the iterative process takes place, in which every individual chromosome in population is ranked by the fitness function and based on these ranks (fitness), best chromosomes are selected and modified with genetic operators to create a new generation. Iteration can be terminated. There are several terminating conditions possible for the iterative process, such as: maximum number of iterations (generations) reached, calculation time exceeded, a solution found with assumed accuracy.

3.2   Binary representation

Consider that the domain is 2-D and there are *N* source points distributed outside, the position of each source point is defined by its coordinates, which means there are *2N* parameters to be optimized. Furthermore, it is assumed that each coordinate is determined with finite precision and limited to a certain range. Consequently, for the *i-th* parameter $x_i \in <a,b>$, where $i \in <1,2N>$ and *a, b* denoting the lower and upper limit of the range respectively, there are $d = (b-a)*10^q$ feasible solutions, where *q* stands for assumed accuracy. In such situation, *K* bits are required in order to encode all feasible solutions, where $2^K > d$.

3.3   Genetic procedures

The iterative process in which new generations are created involves such procedures as selection, mutation and cross-over. Selection is the procedure used in order to chose the best chromosomes from each population to create the new one. Mutation and cross-over are used to modify the chromosomes, and so to find new solutions.

In selection, parents for the new generation are chosen using the fitness function, in this case, using fitness proportionate selection also called roulette-wheel selection. Based on values assigned to each solution by fitness function, the probability of being selected is calculated for every individual chromosome. Consequently, the candidate solution whose fitness is low will be less likely to be selected as a parent whereas it is more probable for candidates with higher fitness to become a parent.

Cross-over operation requires two chromosomes (parents) which are cut in one, randomly chosen point (locus) and since this point the binary code is swapped between the chromosomes creating two, new chromosomes, as it is shown at Fig. 3:

Figure 3: Cross-over scheme

Mutation procedure in case of binary representation of solution is an operation of bit inversion at randomly chosen position. This purpose of this procedure is to introduce some diversity into population and so to avoid premature convergence to local maximum.

Figure 4: Mutation scheme

4   Biharmonic problem

Biharmonic equation is used in applied mechanics for modeling such problems as flexure of thin plates, slow viscous flow of Newtonian fluids and plane problems of elasticity theory. Generally, the problem is defined as follows:

$$\nabla^4 u = 0 \text{ in the domain } \Omega, \tag{1}$$

$$u = g_1, \quad \frac{\partial u}{\partial n} = h_1 \text{ on the boundary } \partial\Omega_1, \tag{2}$$

$$u = g_2, \quad \frac{\partial^2 u}{\partial n^2} = h_2 \text{ on the boundary } \partial\Omega 2, \tag{3}$$

where $\frac{\partial u}{\partial n}$ denotes the outward normal derivative, and g_1, g_2, h_1 and h_2 are prescribed functions.

4.1   Test problem

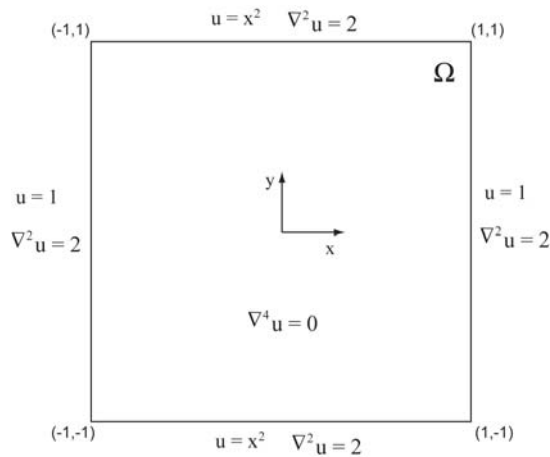The geometry in which the biharmonic problem is solved is a square with following boundary conditions:

Figure 5: Geometry of the biharmonic problem

4.2 Solution

The solution of biharmonic problem, by means of MFS is represented by the linear combination of fundamental solution and it takes the following form:

$$\hat{u}(\mathbf{x}) = \sum_{j=1}^{N} c_j \varphi_1(\mathbf{x}) + \sum_{j=N+1}^{2N} d_j \varphi_2(\mathbf{x}), \tag{4}$$

$$\varphi_1(\mathbf{x}) = \log r_j, \tag{5}$$

$$\varphi_2(\mathbf{x}) = r_j^{2} \log r_j, \tag{6}$$

$$r_j = \sqrt{(x - x_j)^2 + (y - y_j)^2}, \tag{7}$$

Where φ_1, φ_2 are the fundamental solutions of harmonic and biharmonic equations respectively, c_j, d_j are unknown coefficients, x_j, y_j are source points coordinates. The unknown coefficients are determined by satisfying appropriate boundary conditions by means of boundary collocation method. During the calculation the total number of collocation points $NC=120$ was assumed (30 points on each boundary) whereas the total number $NS=12$ of source points was used. Due to the fact that the number of collocation points is greater than the number of source points, the linear system is over-determined and so collocated boundary conditions are satisfied in least-square sense.

Table 1 presents some of the numerical results i.e. maximum error and mean square error which are related to exact solution which is known for this problem. There is a comparison between solution for the calculations performed with source points located on the contour and source points distributed by GA: The difference is remarkable, especially in case of maximum error.

	GA	Contour
Mean Sqr. Err. $\nabla^2 u$	0,0002	0,001
Mean Sqr. Err. u	0,0001	0,0004
Max Err. $\nabla^2 u$	0,035	0,18
Max Err. u	0,012	0,06

Table 1: Biharmonic problem: Errors on the boundaries

The arrangement of source points distributed on the contour similar to the geometry of the considered problem is presented at Fig. 6. The offset of the source points contour from the boundary of the domain is 0.2.
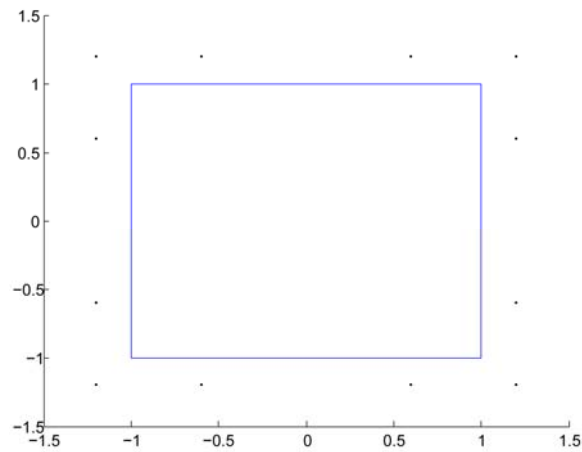
Figure 6: Sources points arrangement

The plots of the solution and solution error, which were calculated using source points distributed on the contour are presented below at Fig 7:

a)   b)
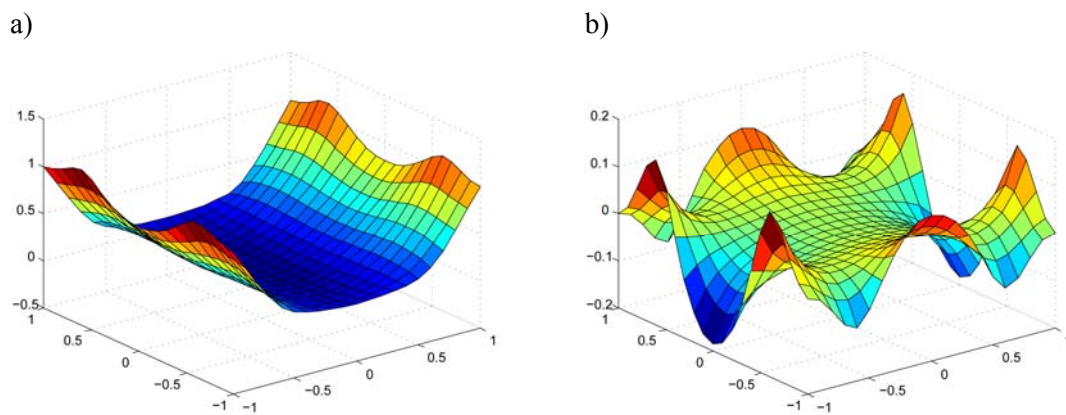
Figure 7: Biharmonic problem: a) solution, b) solution error

The plot of source points arrangement determined by genetic algorithm is presented at Fig. 8. It is assumed that all source points should be located in a certain area i.e the distant between any source point and geometry should not be greater then 2.0. The position of each source point is determined with assumed accuracy $e=10^{-3}$.
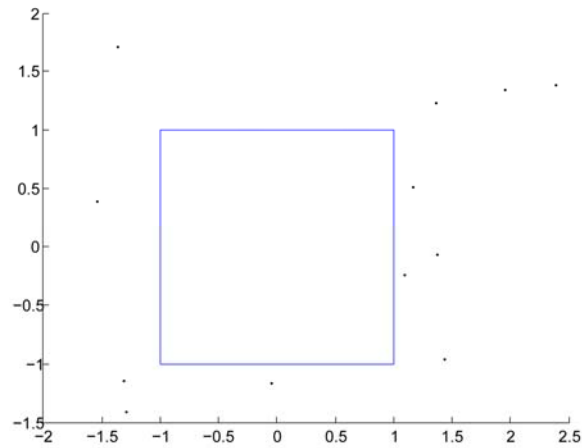

Figure 8: Source points arrangement

a)   b)
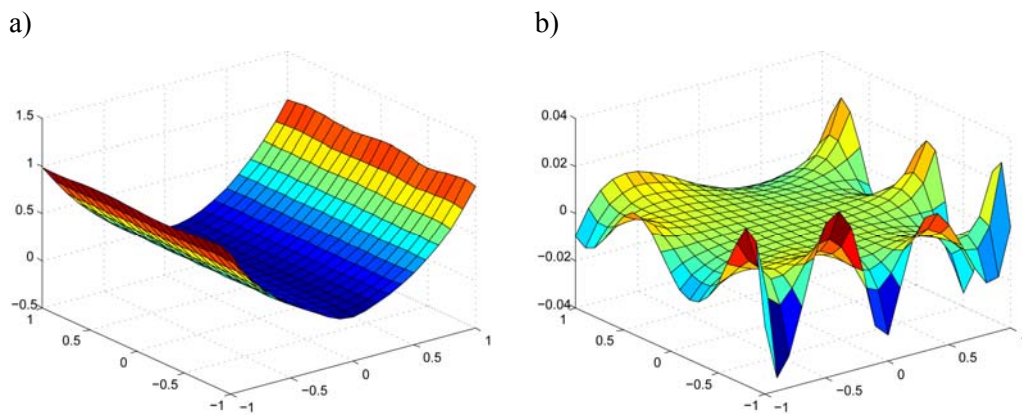

Figure 9: Biharmonic problem: a) solution, b) solution error

5   The Motz problem

The Motz problem has been chosen as it is considered to be a benchmark problem for Boundary Element Methods. The difficulty of this problem is that it has a singularity on one of its boundaries. The singularity occurs in the point, where boundary conditions changes rapidly

5.1   Geometry

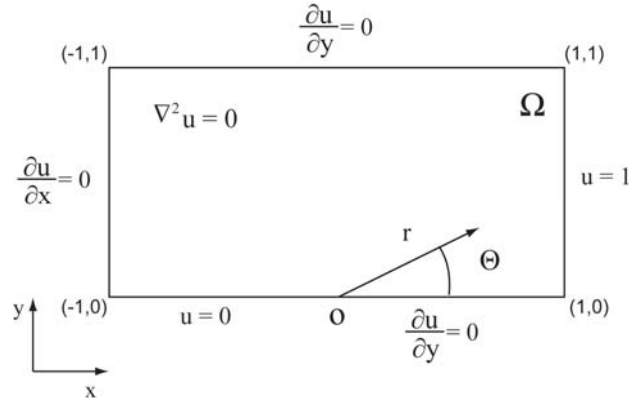The geometry of the Motz problem with all boundary conditions defined is presented at Fig 10:

Figure 10: Geometry of the Motz problem

5.2   Solution

The solution of the Motz problem, due to the singularity, which occurs at one of the boundaries, consists of two parts. The first part is the linear combination of fundamental solution whereas the second part describes the singularity. Hence, the solution takes the following form:

$$u_n(\mathbf{x}) = \sum_{k=1}^{N} \alpha_k r^{\left(\frac{2k-1}{2}\right)} \cos\left[\left(\frac{2k-1}{2}\right)\Theta\right] + \sum_{i=1}^{N} c_j \log r_j \tag{8}$$

The simplified form of the equation:

$$u_n(\mathbf{x}) = \sum_{k=1}^{N} \alpha_k r^{\beta_k} \cos[\beta_k \Theta] + \sum_{i=1}^{N} c_j \log r_j \tag{9}$$

Where: α_k, β_k, c_j are unknown coefficients.

The calculation were performed for *NC=60* collocation points and *NS=12* source points. In this case, positions of source points were also determined by GA or located on the scaled geometry contour for comparison purpose. Moreover, multi-objective optimization was performed, as it turned out that some boundary condition are easily satisfied while others are not. For that reason, weighting method was applied in order to make GA more sensitive to those more problematic boundary conditions.

The calculation result presented in Table 2 is presented for every individual boundary, which was considered. Similarly to previous example, results obtained both with GA application and without it are compared. In this example the difference between these two approaches is also significant. The numbers in the table are the maximum errors of each boundary condition fulfillment.

Boundary		Alg. Gen.	Contour
-1<x<0	y=0	0,064	0,006
0<x<1	y=0	0,016	0,014
-1<x<0	y=1	0,053	0,248
0<x<1	y=1	0,093	0,348
x=-1	0<y<1	0,065	0,032
x=1	0<y<1	0,033	0,051

Table 2: Motz problem: maximum error at boundaries

The arrangement of source points on the contour similar to the problem geometry is presented on the Fig. 11: The offset of the source point contour is 0.2.
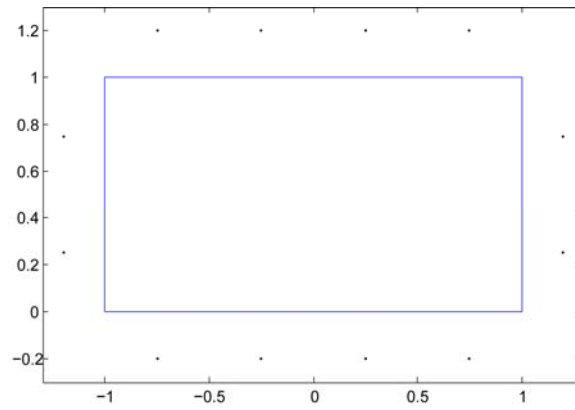

Figure 11: Sources points arrangement

For such an arrangement of source points, there are plots of $\dfrac{\partial u}{\partial x}$, $\dfrac{\partial u}{\partial y}$ presented at Fig 12:
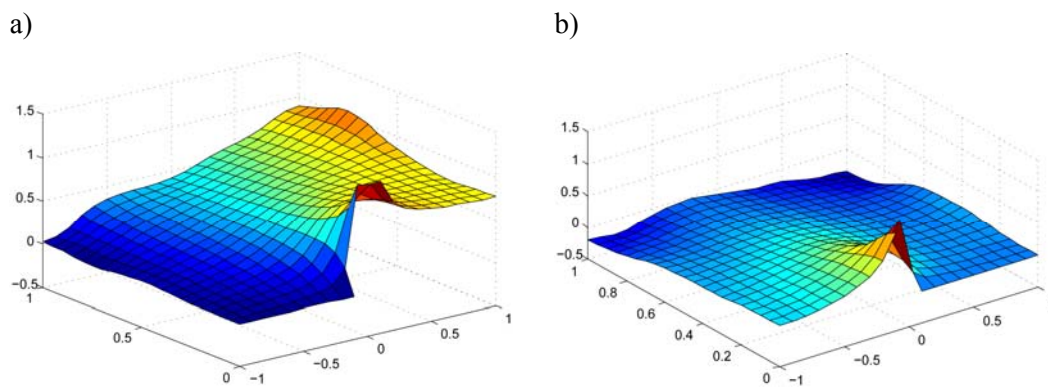
a)   b)

Figure 12: Motz problem: a) $\dfrac{\partial u}{\partial x}$, b) $\dfrac{\partial u}{\partial y}$

The arrangement of source points determined using genetic algorithm is presented at Fig.13. In this case, the area in which source points should be located is also assumed and the maximum distant between the geometry of the problem and each source point should be less than 2.0.
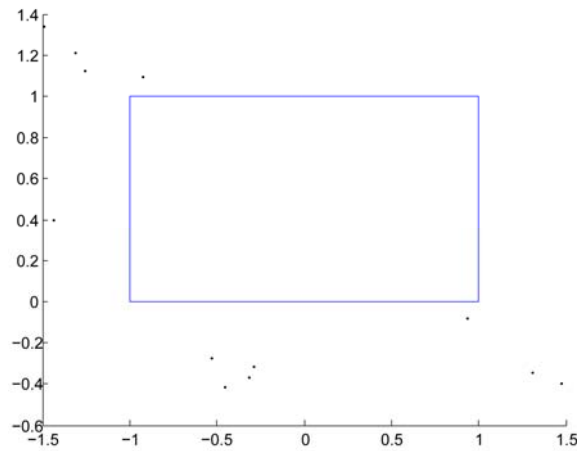

Figure 13: sources points arrangement

The plots o of $\dfrac{\partial u}{\partial x}$, $\dfrac{\partial u}{\partial y}$ obtained with source points distributed by genetic algorithm are shown at Fig. 14:
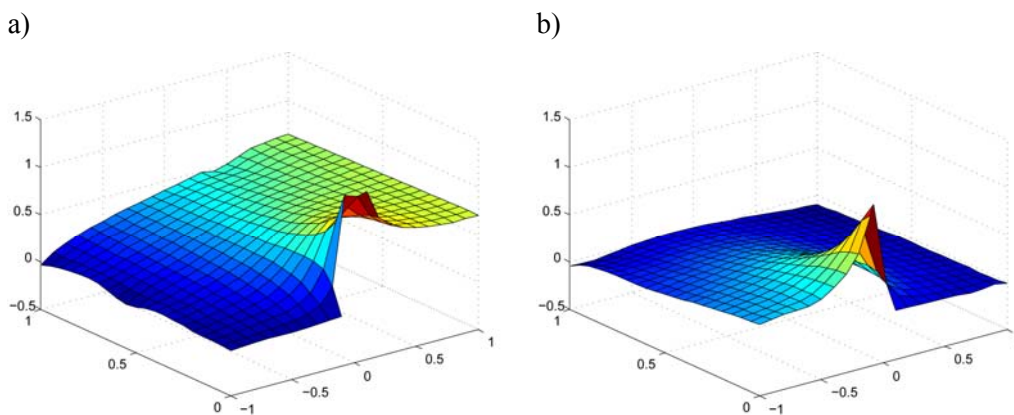
a)   b)

Figure 14: Motz problem: a) $\dfrac{\partial u}{\partial x}$, b) $\dfrac{\partial u}{\partial y}$

6   Conclusion

Application of genetic algorithm to find optimal or suboptimal arrangement of source point outside the considered domain improves the results as the boundary conditions are satisfied more accurate. The weakness of this approach is computational cost as finding the optimal solution large number of parameters is difficult and for that reason, practically genetic algorithm is used to find suboptimal solution. In this work, multi-objective optimization was successfully applied for the Motz problem, where some boundary conditions are easily satisfied while the others are not. Furthermore, the results for the Motz problem are more accurate when the solution is assumed as a sum of linear combination of fundamental solution and truncated series of singular function.

References

[1] J.T. Chen, C.S. Wu, Y.T. Lee, K.H. Chen: *On the equivalence of the Trefftz method and method of fundamental solutions for Laplace and biharmonic equation.* Computers and Mathematics with Applications, Vol. 53, Issue 6, Pergamon Press (2007), pp. 851-879.

[2] A. Poullikkas, A. Karageorghis, G. Georgiou; *Methods of fundamental solutions for harmonic and biharmonic boundary value problems*; CompM; vol. 21,1998, pp. 416-423.

[3] Z. Michalewicz, *Genetic algorithms + Data Structures = Evolution Programs*, Springer, 1998

[4] R. Nishimura, K.Nishimori, N. Ishihara, *Determining the arrangement of fictitious charges in charge simulation method using genetic algorithms*, J. Electrostatics, Vol. 49, 2000, pp. 95-105

[5] R. Nishimura, K.Nishimori, N. Ishihara, *Automatic arrangement of fictitious charges and contour points in charge simulation method for polar coordinate system*, J. Electrostatics, Vol. 51-52, 2001, pp. 618-624

[6] R. Nishimura, K.Nishimori, N. Ishihara, *Automatic arrangement of fictitious charges and contour points in charge simulation method for two spherical electrodes*, J. Electrostatics, Vol. 57, 2003, pp. 337-346

[7] P. Mitica, Y.F. Rashedb, *Convergence and stability of the method of meshless fundamental solutions using an array of randomly distributed sources*, Eng. Anal. Bound. Eelem., Vol. 28, 2004, pp. 143-153

[8] J. Wang, J.D. Lavers, *On the determination of the Locations for the Virtual Sources in the Method of Fundamental Solutions for Eddy Current Problems*, IEEE T Magn., Vol 31, No. 6, 1995, pp. 3512-3514